



TEMPERATURE CONTROL SYSTEM

Microwave Dielectric Measurements in High Temperature

Measurement Demonstration

Measurements acquired with EpsiMu® PE13 from 30° to 80° at 100 MHz and 1 GHz

Ethanol $\geq 99.8\%$

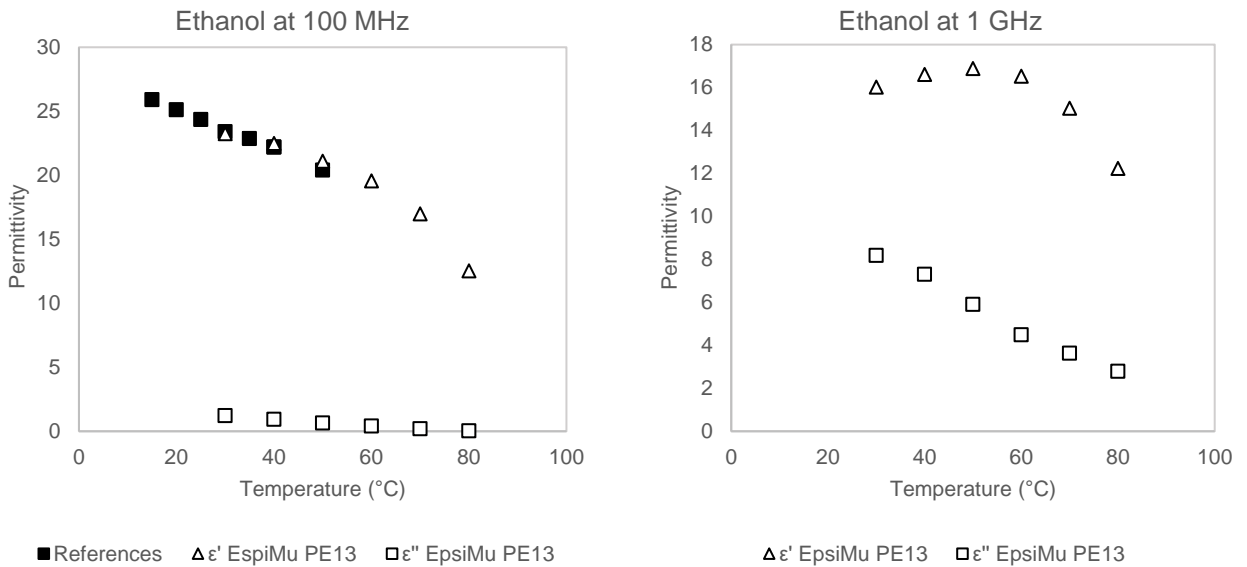


Fig. 4. (left) Real part of permittivity ϵ' (Δ) and imaginary part of permittivity ϵ'' (\square) EpsiMu measurement of ethanol as function of temperature, from 30° to 80°, at 100 MHz; comparison with references from Puranik et al, 1993, Khirade et al, 1999 and Checinska-Majak et al, 2012 (■); (right) Real part of permittivity ϵ' (Δ) and imaginary part of permittivity ϵ'' (\square) EpsiMu measurement of ethanol as function of temperature, from 30° to 80°, at 1 GHz. Measurement errors are not displayed for clarity reasons; please see [Technical Properties](#) for measurement errors.

APU10 (absorbent magnetic material)

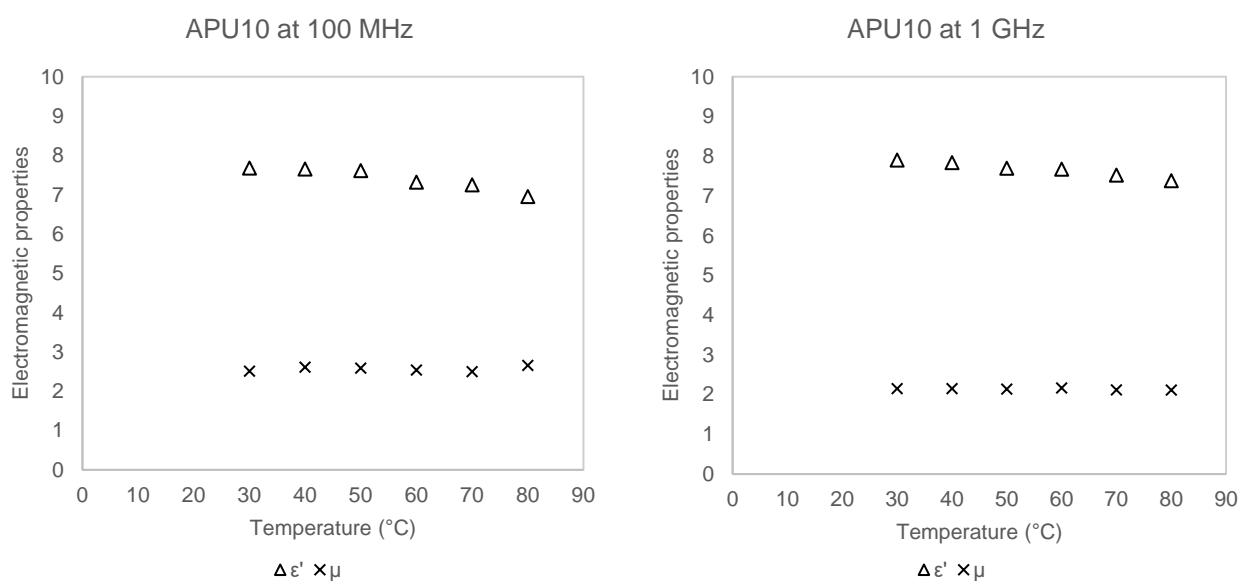


Fig. 5. (left) Real part of permittivity ϵ' (Δ) and real part of permeability μ (x) EpsiMu measurement of APU10 as function of temperature, from 30° to 80°, at 100 MHz; (right) Real part of permittivity ϵ' (Δ) and real part of permeability μ (x) EpsiMu measurement of APU10 as function of temperature, from 30° to 80°, at 1 GHz. Measurement errors are not displayed for clarity reasons; please see [Technical Properties](#) for measurement errors.

Measurements acquired with EpsiMu® 7mm from 30° to 80° at 530 MHz and 12 GHz

Air (constant permittivity with temperature)

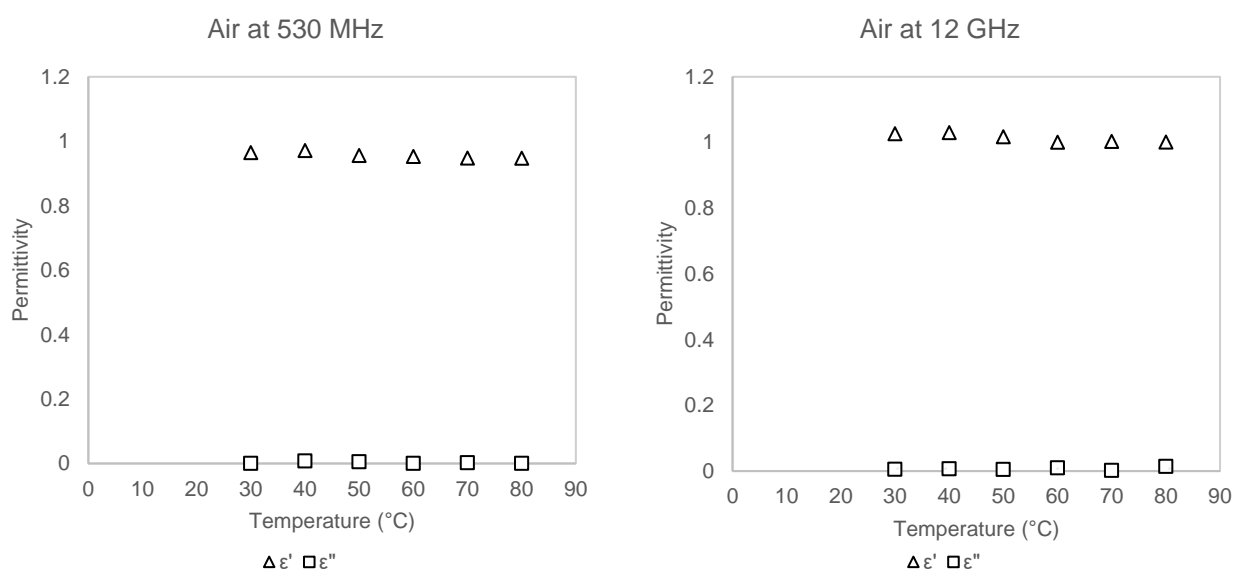


Fig. 6. (left) Real part of permittivity ϵ' (Δ) and imaginary part of permittivity ϵ'' (□) EpsiMu measurement of air as function of temperature, from 30° to 80°, at 530 MHz; (right) Real part of permittivity ϵ' (Δ) and imaginary part of permittivity ϵ'' (□) EpsiMu measurement of air as function of temperature, from 30° to 80°, at 12 GHz. Measurement errors are not displayed for clarity reasons; please see [Technical Properties](#) for measurement errors.

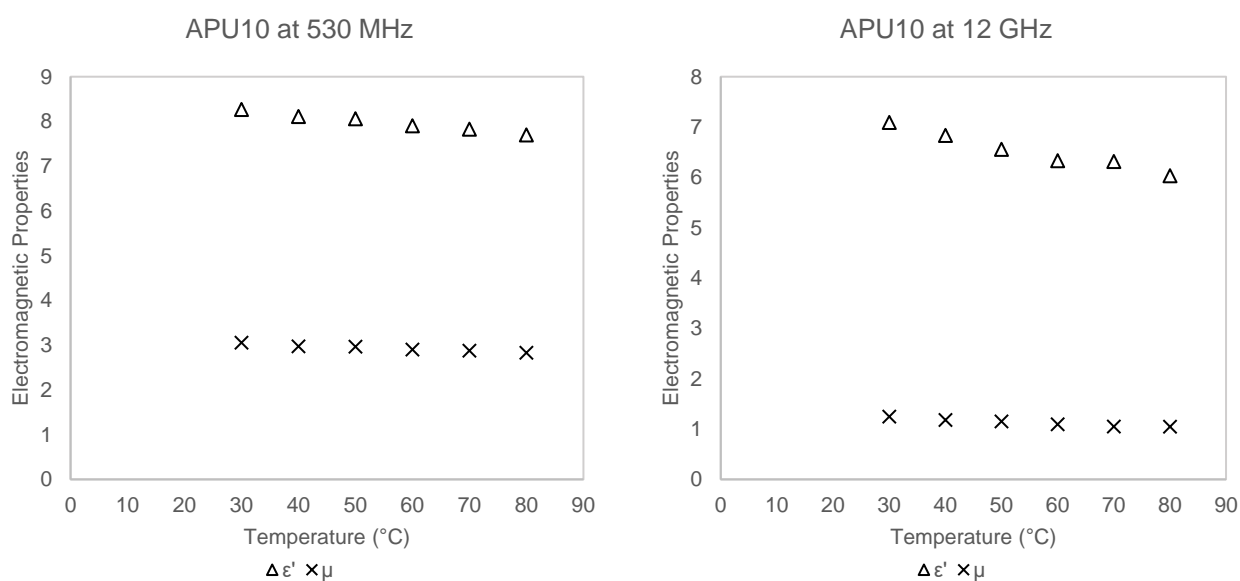
APU10 (absorbent magnetic material)

Fig. 7. (left) Real part of permittivity ϵ' (Δ) and real part of permeability μ (\times) EpsiMu measurement of APU10 as function of temperature, from 30° to 80°, at 530 MHz; (right) Real part of permittivity ϵ' (Δ) and real part of permeability μ (\times) EpsiMu measurement of APU10 as function of temperature, from 30° to 80°, at 12 GHz. Measurement errors are not displayed for clarity reasons; please see [Technical Properties](#) for measurement errors.

Technical Properties

	EpsiMu® 7mm	EpsiMu® PE13
Temperature Range	Room temperature to 85°C	
Temperature Precision	1°C	
Frequency Range	10 MHz to 18 GHz	10 MHz to 8 GHz
Heating delay time	No time restrictions (seconds)	
Number of T°C points	70 points (starting at 15°C)	
Sample type	Washer-shaped solids	Solids, powders, liquids, etc.
Sample length range (mm)	2 to a few mm ($< \frac{\lambda}{2}$)	2 to sample holder length
Measurement Accuracy	$\frac{\Delta\epsilon'}{\epsilon'} < 5\%$; $\frac{\Delta\epsilon''}{\epsilon''} < 10\%$	$\frac{\Delta\epsilon'}{\epsilon'} < 5\%$; $\frac{\Delta\epsilon''}{\epsilon''} < 10\%$
Length of Sample-Holder	-	24mm or higher